

Chapter 1

Introduction

Exercises

1.1) Here's just an example of a reasonable response:
(ref. [8] in Chap. 1)


- 1955 Denavit & Hartenberg developed methodology for describing linkages.
- 1961 George Devol patents design of first robot.
- 1961 First unimate robot installed.
- 1968 Shakey Robot developed at S.R.I.
- 1975 Robot institute of America formed.
- 1975 Unimation becomes first Robot Co. to be profitable.
- 1978 First Puma Robot shipped to GM.
- 1985 Total U.S. market exceeds 500 million dollars (annual revenue).

Developments might be split into a technical list and a business list.

1.2) (Based on 1981 numbers)


Source:

L. Conigliaro, "robotics presentation, institutional investors conf.", May 28, 1981, Bache Newsletter 81-249.:

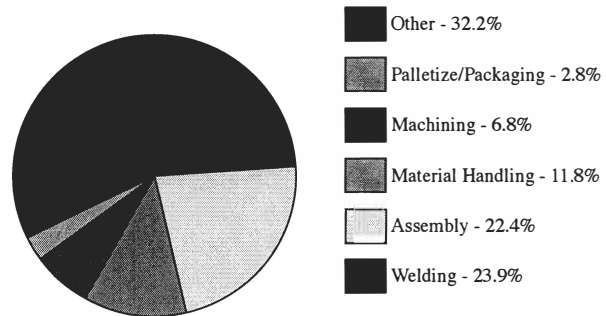

1.3)

People Are Flexible, But More Expensive Every Year

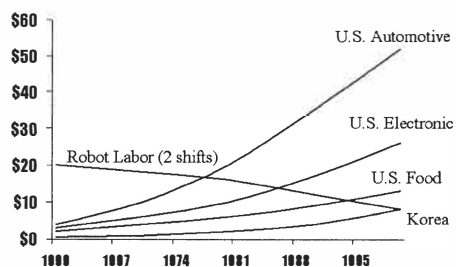

1.4) *Kinematics* is the study of position and derivatives of position without regard to forces which cause the motion. *Workspace* is the locus of positions and orientations achievable by the end-effector of a manipulator. *Trajectory* is a time based function which specifies the position (and higher derivatives) of the robot mechanism for any value of time.

1.5) *Frame* is a coordinate system, usually specified in position and orientation relative to some imbedding frame. *Degrees of freedom* is the number of independent variables which must be specified in order to completely locate all members of a (rigid-body) mechanism. *Position control* implies the use of a control system, usually in a closed-loop manner, to control the position of one or more moving bodies.

1.6) *Force control* is the use of (usually closed-loop) algorithms to control the forces of contact generated when a robot touches its work environment. *A robot programming language* is a programming language intended for use in specifying manipulator actions.

1.7) *Structural stiffness* is the “K” in $F = K\Delta X$ (A.K.A. “Hooke’s law”) which describes the rigidity of some structure. *Nonlinear control* refers to a closed loop control system in which either the system to be controlled, or the control algorithm itself is nonlinear in nature. *Off line programming* is the process of creating a program for a device without access to that device.

1.8) See references. For example, in 1985 average labor costs of \$15 to \$20 per hour are reasonable (depending how fringe benefits are calculated).

1.9) Obviously it has increased dramatically. Recently (1988–1990) the ratio doubles or even triples each year.

1.10) See Figure 1.3, but use latest data you can find.

Chapter 1 Solutions for Introduction to Robotics

```
1.11 do the following seven times {
    playerCounter = 1

    do the following four times {
        open gripper
        move to P_deck
        close gripper
        move to P_playerCounter
        playerCounter = playerCounter + 1
    } // end four-times loop
} // end seven-times loop
```

2. Mechanical manipulators: welding robots on automotive assembly lines, wafer-handling robots in semiconductor manufacturing, parallel-platform robots for flight simulators Fixed automation machines: container filling at bottling plant; automatic car wash; printing, cutting, and folding of newspapers
3. A rigid body in space has six *degrees of freedom*. It's free to translate in three directions and to independently rotate about each of those three axes.

1.14.

$${}^A P_3 = \sin(\pi/6) \begin{bmatrix} 3 \\ 1 \\ 5 \end{bmatrix} + \cos(\pi/3) \begin{bmatrix} 2 \\ 6 \\ 9 \end{bmatrix} = \begin{bmatrix} 2.5 \\ 3.5 \\ 7.0 \end{bmatrix}$$

5. Below are some possible considerations when using motors at joints

Pros:

- Simple design
- Low maintenance requirement

Cons:

- More moving mass \rightarrow larger motors required
- Greater inertia effects